



CF15 Oil Pump



Directly couples to any NEMA 56C face motor

Features



- Whisper Vane Technology.
- Built in Pressure Regulation Valve to set pump performance. Will bypass %100 of pump flow while maintaining pressure.
- Built in reverse flow protection check valve so that discharge port oil pressure cannot motor the pump backwards.
- Direct shaft coupling, for simple, long life.
- Pump head can be rotated to four positions to accommodate plumbing.
- Pump can be mounted to any 56 C face motor... AC, DC, or Air.

| Pump Dimensions | | | | | | | | | | | | |
|---|--------------------|---------------------|----|------|-----|------|-----|------|-----|----------|--|--|
| Motor Specs. | Max Flow | Max Pres. | | A | B | C | D | E | F | G | H - J | |
| 24V, 39 amp D.C. | 15 gpm (56 l/m) | 50 psi (3.4 bar) | in | 6.3 | 6.5 | 13.6 | 3.2 | 3.0 | 7.3 | 4.0/5.75 | H - Discharge Port 1 5/16"-12 (SAE -16) Straight Thread O-Ring | |
| | | | mm | 160 | 165 | 345 | 81 | 76 | 186 | 100/145 | | |
| 208-230/460 VAC, 4-3.5/1.7 amp, 3 Phase A.C. TEFC | 15 gpm (56 l/m) | 50 psi (3.4 bar) | in | 7.3 | 9.1 | 15.0 | 3.2 | 30.0 | 6.8 | 4.9 | J - Suction Port 1 5/8"-12 (SAE -20) Straight Thread O-Ring | |
| | | | mm | 186 | 231 | 381 | 81 | 76 | 173 | 125 | | |
| 115/208-230, 14.3/7.4-7.2 amp, 1 Phase A.C. TEFC | 15 gpm (56 l/m) | 50 psi (3.4 bar) | in | 8.7 | 8.4 | 16.8 | 3.2 | 3.0 | 9.2 | 4.9 | J - Suction Port 1 5/8"-12 (SAE -20) Straight Thread O-Ring | |
| | | | mm | 221 | 214 | 427 | 81 | 76 | 234 | 125 | | |
| Air Driven Motor 1 3/4 hp | 15 gpm (56 l/m) | 50 psi (3.4 bar) | in | ~9.2 | 7.0 | 11.0 | 3.5 | 3.0 | 5.9 | 5.5 | J - Suction Port 1 5/8"-12 (SAE -20) Straight Thread O-Ring | |
| | | | mm | ~233 | 177 | 279 | 89 | 76 | 150 | 140 | | |

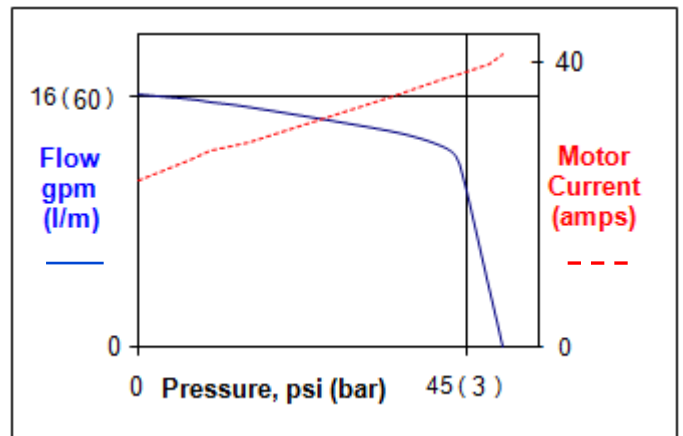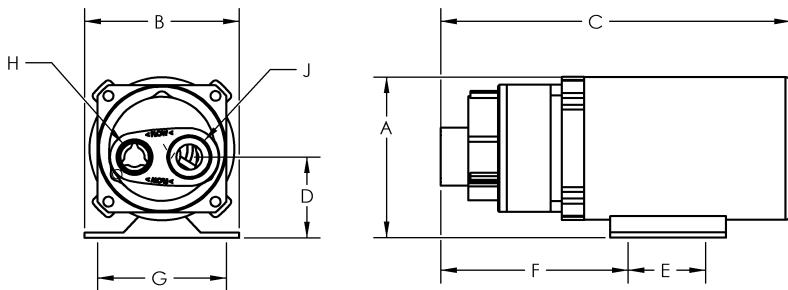

VARNA Products
 4305 Business Dr.
 Cameron Park, CA 95682, USA
www.VarnaProducts.com
1 (888) 676-7770
 +1 (530) 676-7770 (International)



Plumbing Considerations

The CF15 pump delivers up to 15 gpm (56 l/m) of oil flow. It is a self-priming and quiet-running vane pump. It includes a self-contained, pressure bypass valve to prevent motor overload, and a low-pressure-loss check valve to prevent backflow. This is particularly valuable in prelube applications to prevent backflow from the main engine lube pump. It can produce up to 50 psi (56 l/m) pressure.

Because these oil pumps do not run at thousands of psi like a hydraulic system, excessive pressure drop caused by small pipes can degrade system performance. Small suction pipes will starve the pump and reduce output flow by causing cavitation. Small pressure pipes will create excessive backpressure that will reduce output flow by causing more bypass flow. Therefore, elbows and long runs of pipe should be avoided. 15 gpm (56 l/m) of cold oil can easily eat up 50 psi (3.4 bar) when the plumbing is too restrictive.

The pump itself does not create pressure. It produces flow. Like a turnstile, every rotation of the pump delivers a metered volume of oil to the other side. Whatever system is connected to the pump has flow resistance that produces backpressure as the pump works to maintain flow.

Available pump motor horsepower can develop only a given amount of pressure, in this case about 50psi (3.4 bar). The each elbow and each inch of pipe has a cumulative effect. If the plumbing uses up all available pressure there will be no pressure left for the job the pump is intended to do.

It is recommended that hose or pipe no smaller than 1" (25mm) be used and that the suction hose in particular is kept as large and short as possible and no longer than 36" (3m). Always use the biggest and shortest hoses practical.

Wiring Considerations

The CF15 can be mounted to any NEMA 56C Motor. The motor and the pump need to be matched to your application to ensure adequate performance. Motor protection should be used in the circuit as pre motor manufacturers recommendation.

Application Engineering

It is challenging to address every possible installation type. We are always happy to help in choosing an appropriate installation package. Give us a call for engineering assistance and support. 888-676-7770